


Fiber amplifiers featuring dual outputs, dual displays, and dual sensitivity correction functions

- Enables detection for any application
- Water resistant types (IP66) and models with analog outputs are also available
- Adapts to usage environments with its numerous functions

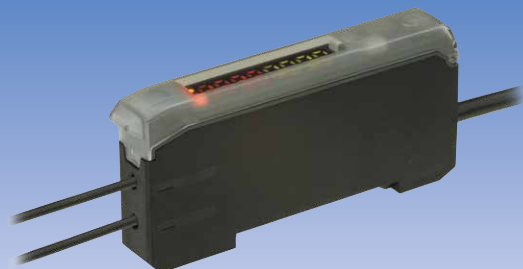

Related products

High-speed digital

D3RF
● P.110



Potentiometer type

BRF
● P.130



Amplifier separate type

DS
● P.280



Selection table

| Type | Shape | Input/output | Light source | Degree of protection | Model (Models in parentheses are connector types) | |
|---|-------|--|-------------------------|----------------------|---|---------------------------------|
| | | | | | NPN type | PNP type |
| Inter-connection master | | Control output: Dual output (CH1 & CH2*) | Red 4 element LED | IP50 | D2RF-TMN (D2RF-TMCN4) | D2RF-TMP (D2RF-TMCP4) |
| Inter-connection slave | | | | | D2RF-TSN (D2RF-TSCN4) | D2RF-TSP (D2RF-TSCP4) |
| Stand-alone type | | | | | D2RF-TN (D2RF-TCN4) | D2RF-TP (D2RF-TCP4) |
| Stand-alone type Equipped with analog output | | Control output: Single output Analog output: 4 to 20 mA | | D2RF-TAN | D2RF-TAP | |
| Water resistant stand-alone type | | Control output: Dual output (CH1 & CH2*) | | IP66 | D2RF-2TN (D2RF-2TCN4) | D2RF-2TP (D2RF-2TCP4) |
| Water resistant stand-alone type Equipped with analog output | | Control output: Single output Analog output: 4 to 20 mA | | | D2RF-2TAN | D2RF-2TAP |

*CH2 can be switched to control output (CH2), alarm output, teach input, or counter reset input.

● For the connector type, please purchase an optional JCN series connector cable.

Options/Accessories

Connector cables

Straight



JCN-S

Cable length: 2 m

JCN-5S

Cable length: 5 m

JCN-10S

Cable length: 10 m

L-shaped



JCN-L

Cable length: 2 m

JCN-5L

Cable length: 5 m

JCN-10L

Cable length: 10 m

End plate



BEF-EB01-W190

(2 pieces)

Reflective sheet



Diamond grade sheet

100 × 100 mm (adhesive type)

Reflector heat resistant to 300°C



SW50


ø80 × 20 mm (ø50 mm reflective surface)

Dual outputs, displays and sensitivity correction functions

Dual output


Features 2 control outputs as standard. For each output channel, you can set Light ON/Dark ON, timer and threshold independently. Also, a dual output type with a control output and analog output (4 to 20 mA) is available. (Analog output type is stand-alone type only)

Control output x2CH type



- *Control output CH2 can be set to one of the following functions.
- If using as an output line
 - Control output CH2
 - Alarm output (attenuations in the receiving light quantity are output in advance)
 - If using as an input line
 - Teach input
 - Counter reset input (when using counter function)



Control output + analog output type



- The receiving light quantity indicator of the type equipped with an analog output displays from 0 to 4000.
- Although scaling (span adjusting) is possible, inversion and shifting are not supported.

0 to 9999 dual digital display (0 to 4000 when in Fast response time mode and in the case of analog output equipped types)



Current receiving light quantity and threshold are shown using dual displays. Fine sensitivity adjustments can easily be made after teaching. Also, through the adoption of a high brightness LED, numerical values can be confirmed at a glance even in bright worksites.

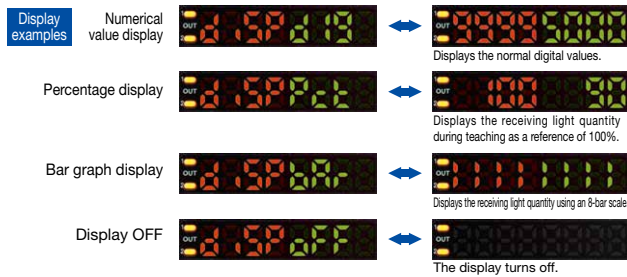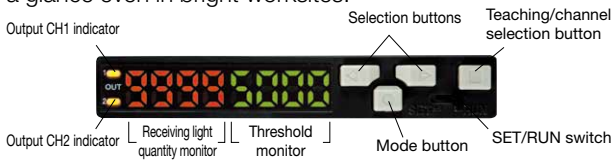

An industry first! Dual sensitivity correction function "ASC" (Automatic sensitivity correction/restoration)

*When using transparent object teaching



This function works to maintain optimal sensitivity levels over long periods of time by automatically performing sensitivity corrections when light level decreases occur due to contamination of fiber tips caused by dust, etc. Because threshold levels will be automatically restored after cleaning, re-teaching is not necessary. (ASC can be switched ON/OFF)

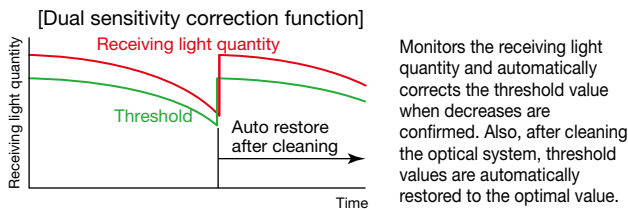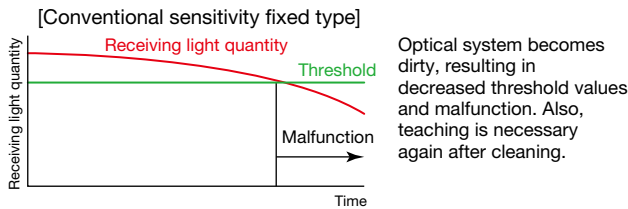

Dual support for difficult detection conditions

Automatic power control "APC" + 4 element red LED light source

The D2RF employs a newly developed 4 element red LED for the light source. In addition to minimizing the decreases in emitted light that occur over time, the "APC" (Automatic Power Control) automatically corrects changes in light emission levels. This function is effective when a change to the emitted light power occurs, causing instability and difficulty in performing detection. (APC can be switched ON/OFF)

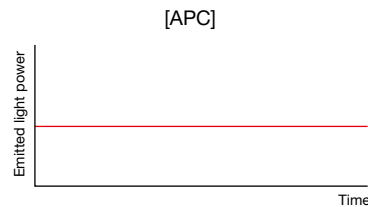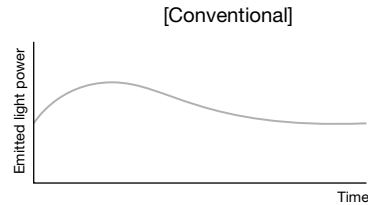

Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors

Fiber Amplifiers

D3RF, D3IF

UC1-CL11

D2RF

BRF, BIF


JRF

Interconnection

Up to 8 units can be connected

Wiring can be reduced


Up to 8 inter-connection type master and slave units can be linked. (cross talk prevention functionality for up to 4 units)
Because only output line wiring is necessary for slave units, necessary man-hours for wiring can be cut in half.

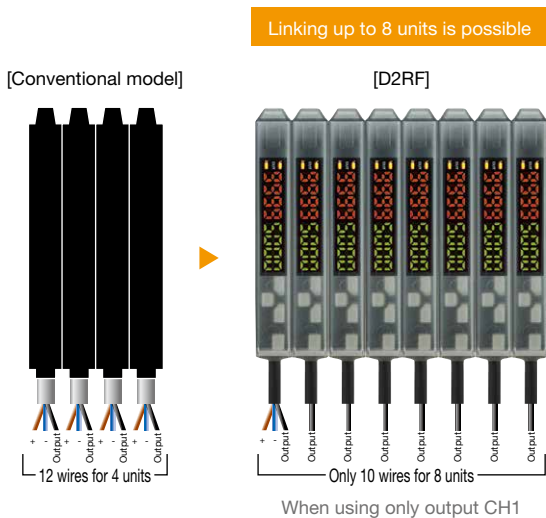

Batch setting for amplifier settings

Batch setting is possible

This function enables simultaneous setting of all linked (expanded) amplifiers. Zero reset and 1-point teaching, as well as copying of amplifier settings from upstream (master unit side) to downstream (terminal slave unit side) can be performed. Because separately sold setting tools are not required, convenience is maximized.

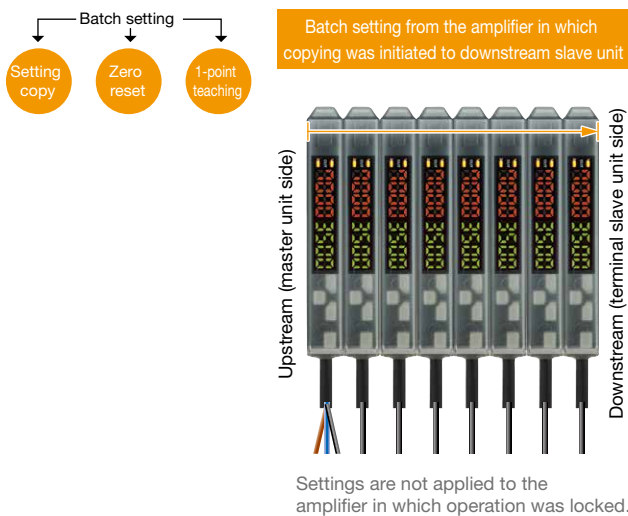

Cross talk prevention

Installing fiber cables side by side (only for Long mode and Standard mode)

By linking the master and slave units, light emission timing can be shifted electronically to prevent malfunctions caused by cross talk. (Up to 4 amplifiers)



User-friendly


External teaching is available

Teach input

By setting CH2 of the control output as the teach input, adjustments to the optimal sensitivity for multiple sensors can be made simultaneously with one teaching. This is very useful for amplifier units installed in narrow space.

*Analog output equipped types do not have a teach input.

*Teaching mode will be the mode performed in advance on the amplifier main unit (default: 1-point teaching)

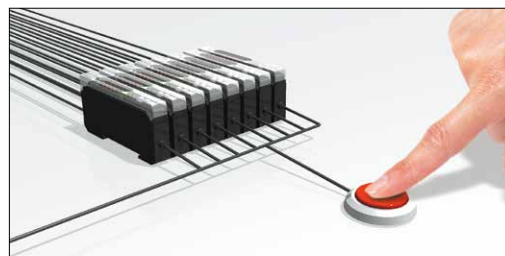

Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors

Fiber Amplifiers

D3RF, D3IF

UC1-CL11

D2RF

BRF, BIF

JRF

Specifications

| Type | | Inter-connection master | Inter-connection slave | Stand-alone type | Water resistant stand-alone type | |
|--|------------------------------|--|------------------------|-------------------|----------------------------------|-------------------|
| Model | NPN | Cable type | D2RF-TMN | D2RF-TSN | D2RF-TN | D2RF-2TN |
| | | Connector type | D2RF-TMCN4 | D2RF-TSCN4 | D2RF-TCN4 | D2RF-2TCN4 |
| | PNP | Cable type | D2RF-TMP | D2RF-TSP | D2RF-TP | D2RF-2TP |
| | | Connector type | D2RF-TMCP4 | D2RF-TSCP4 | D2RF-TCP4 | D2RF-2TCP4 |
| Light source | | 4 element red LED | | | | |
| Response time | | 60 μs (Fast mode) / 250 μs (Std mode) / 2 ms (Long mode) | | | | |
| Distance adjustment | | Teaching / manual adjustment | | | | |
| Indicators | | Output indicator (orange LED) × 2 (CH1/CH2) | | | | |
| Digital display | | 7-segment, 8-digit display (red: 4-digit, green: 4-digit) | | | | |
| Control output | | 2CH output ¹ (CH1/CH2) NPN/PNP open collector Max. 100 mA/30 VDC or less Load current: 100 mA or less ² Residual voltage: 1.8 V or less (CH2 can be set for use as an alarm output) | | | | |
| Analog output | | - | | | | |
| Input settings | | Teach input ³ / counter reset input Selectable by setting (using control output CH2) | | | | |
| Timer function | | OFF delay / ON delay / one-shot / no delay 1 to 9000 ms (adjustment is possible in 1 ms increments) | | | | |
| Output mode | | Light ON / Dark ON selectable by setting | | | | |
| Connectable units ² | | Up to 8 units | | - | | |
| Cross talk prevention No. of units (including master unit) | Fast | Unusable | | - | | |
| | Std | Up to 4 units | | - | | |
| | Long | Up to 4 units | | - | | |
| Connection type | | Cable type: Cable length: 2 m (master unit: ø3.8 mm, slave unit: ø2.8 mm) Connector type: M8, 4-pin | | | | |
| Insulation resistance | | 20 MΩ or more (with 500 VDC) | | | | |
| Rating | Supply voltage | 12 to 24 VDC, including 10% ripple (p-p) | | | | |
| | Current consumption | 45 mA or less / 24 V | | | | |
| Applicable regulations | | EMC directive (2004/108/EC) | | | | |
| Applicable standards | | EN 60947-5-2 | | | | |
| Company standards | | Noise resistance: Feilen Level 3 cleared | | | | |
| Environmental resistance | Ambient temperature/humidity | -25 to +55°C ⁴ / 35 to 85% RH (no freezing or condensation) | | | | |
| | Ambient illuminance | Sunlight: 10000 lx or less Incandescent light: 3000 lx or less | | | | |
| | Vibration resistance | 10 to 55 Hz; double amplitude 1.5 mm; 2 hours in each of the X, Y, and Z directions | | | | |
| | Shock resistance | Approx. 50 G (500 m/s ²), 3 times in each of the X, Y, and Z directions | | | | |
| | Degree of protection | IP50 | | IP66 | | |
| Material | | Housing: PPE Cover: PC | | | | |
| Weight | | Cable type: Approx. 65 g (including cable) Connector type: Approx. 25 g | | | | |
| Included accessories | | Mounting bracket | | | | |

● Specifications are subject to change without prior notice for product improvement purposes.

*1 Threshold adjustment/timer settings and Light ON/Dark ON switching can be set individually for CH1 and CH2.

*2 Total No. of connectable units when used stand-alone or including the master unit: 2 to 3 units. Please use an output current of 50 mA or less when linking a total of 4 to 8 units.

*3 Teaching mode from external input will be the mode performed in advance on the amplifier main unit (default: 1-point teaching).

*4 Total No. of connectable units when including the master unit: 1 to 3 (in the case of inter-connection types) Keep at -25 to +50°C when linking a total of 4 to 8 units.

Specifications


| Type | | Equipped with stand-alone analog output | Equipped with water resistant stand-alone analog output |
|--|------------------------------|---|---|
| Model | Cable type | D2RF-TAN | D2RF-2TAN |
| | Connector type | — | — |
| Light source | | 4 element red LED | |
| Response time | | 60 μs (Fast mode) / 250 μs (Std mode) / 2 ms (Long mode) | |
| Distance adjustment | | Teaching / manual adjustment | |
| Indicators | | Output indicator (orange LED) | |
| Digital display | | 7-segment, 8-digit display (red: 4-digit, green: 4-digit) | |
| Control output | | NPN/PNP open collector Max. 100 mA/30 VDC or less Load current: 100 mA or less Residual voltage: 1.8 V or less | |
| Analog output | | 4 to 20 mA Load impedance 300 Ω or less | |
| Input settings | | — | |
| Timer function | | OFF delay / ON delay / one-shot / no delay 1 to 9000 ms (adjustment is possible in 1 ms increments) | |
| Output mode | | Light ON / Dark ON selectable by setting | |
| Connectable units | | — | |
| Cross talk prevention No. of units (including master unit) | Fast | — | |
| | Std | — | |
| | Long | — | |
| Connection type | | Cable type: Cable length: 2 m, ø4 mm | |
| Insulation resistance | | 20 MΩ or more (with 500 VDC) | |
| Rating | Supply voltage | 12 to 24 VDC, including 10% ripple (p-p) | |
| | Current consumption | 45 mA or less / 24 V | |
| Applicable regulations | | EMC directive (2004/108/EC) | |
| Applicable standards | | EN 60947-5-7 | |
| Company standards | | Noise resistance: Feilen Level 3 cleared | |
| Environmental resistance | Ambient temperature/humidity | -25 to +55°C / 35 to 85% RH (no freezing or condensation) | |
| | Ambient illuminance | Sunlight: 10000 lx or less Incandescent light: 3000 lx or less | |
| | Vibration resistance | 10 to 55 Hz; double amplitude 1.5 mm; 2 hours in each of the X, Y, and Z directions | |
| | Shock resistance | Approx. 50 G (500 m/s ²), 3 times in each of the X, Y, and Z directions | |
| | Degree of protection | IP50 | IP66 |
| Material | | Housing: PPE Cover: PC | |
| Weight | | Cable type: Approx. 65 g (including cable) Connector type: Approx. 25 g | |
| Included accessories | | Mounting bracket | |

- Specifications are subject to change without prior notice for product improvement purposes.

I/O circuit diagram

D2RF-2TN/D2RF-2TCN4, D2RF-TN/D2RF-TCN4,
D2RF-TMN/D2RF-TMCN4, D2RF-TSN/D2RF-TSCN4

■ NPN output type

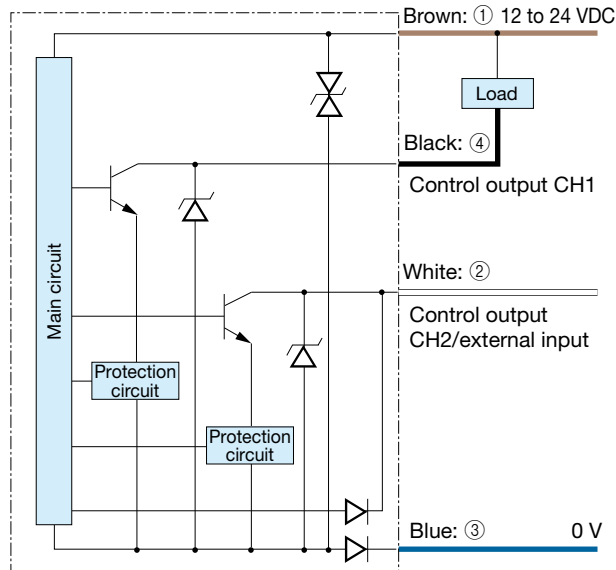

*The D2□F-TS□□□□ slave unit does not have power supply wires (brown/blue) because power is supplied from the master unit.

■ Connector type

(Pin configuration) Sensor side Connector cable side




- ① 12 to 24 VDC
- ② Control output CH2/ external input
- ③ 0 V
- ④ Control output CH1

Connecting

- When not used for control output CH2 or external input, cut the lead wire and wrap it individually with insulating tape, and do not connect it to any other terminal.
- ① to ④ correspond to connector pin No.


D2RF-TAN, D2RF-2TAN

■ NPN output type

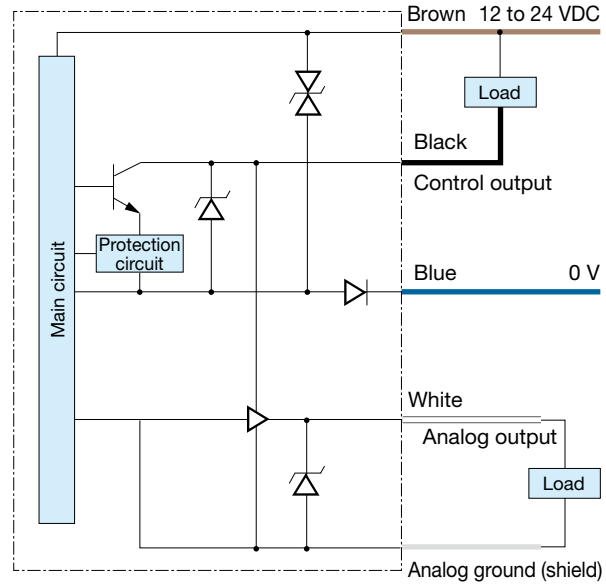

Notes


- When using a switching regulator for the power supply, be sure to ground the frame ground terminal.
- Because wiring sensor wires with high-voltage wires or power supply wires can result in malfunctions due to noise, which can cause damage, make sure to wire separately.
- Avoid using the transient state while the power is on (approx. 100 ms).
- The connector direction is set as in the diagram below when using the L-shaped connector cable. Be aware that rotation is not possible.



Dimensions


Inter-connection type

- D2RF-TMN, D2RF-TMCN4
D2RF-TSN, D2RF-TSCN4

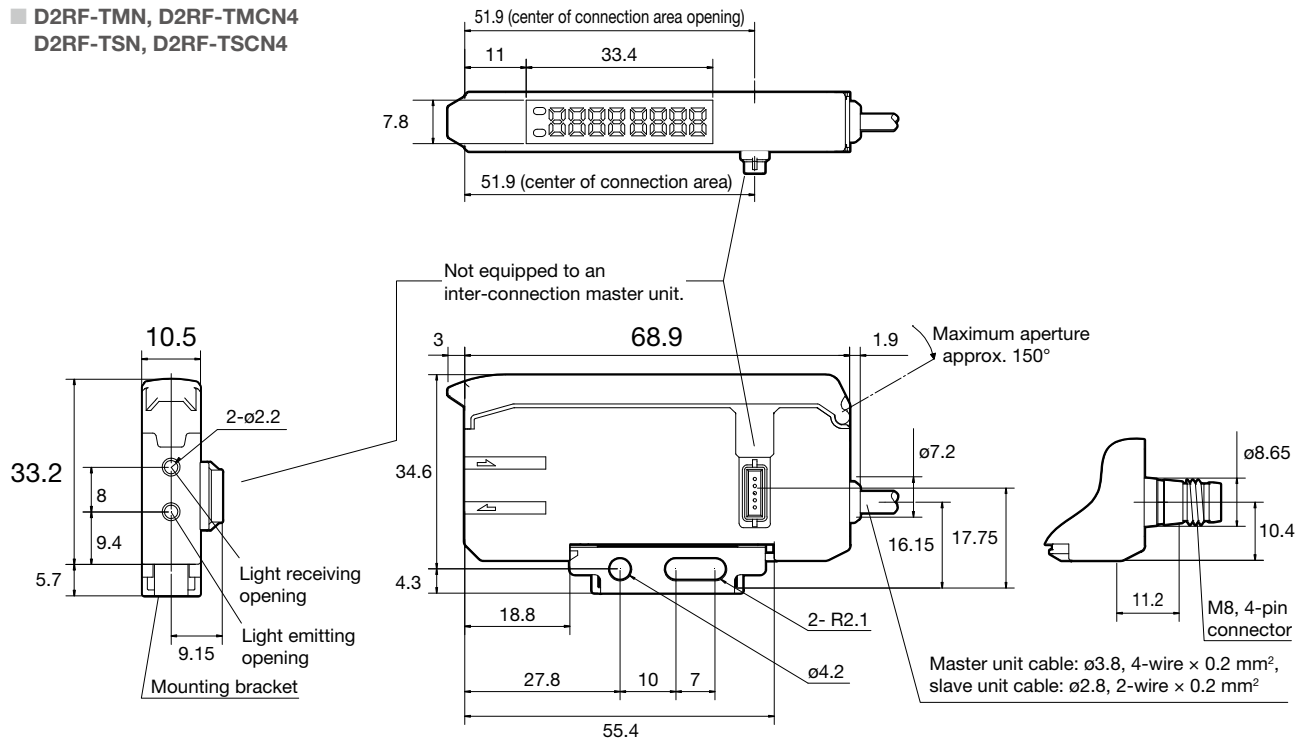

Stand-alone type

- D2RF-TN, D2RF-TCN4, D2RF-TAN

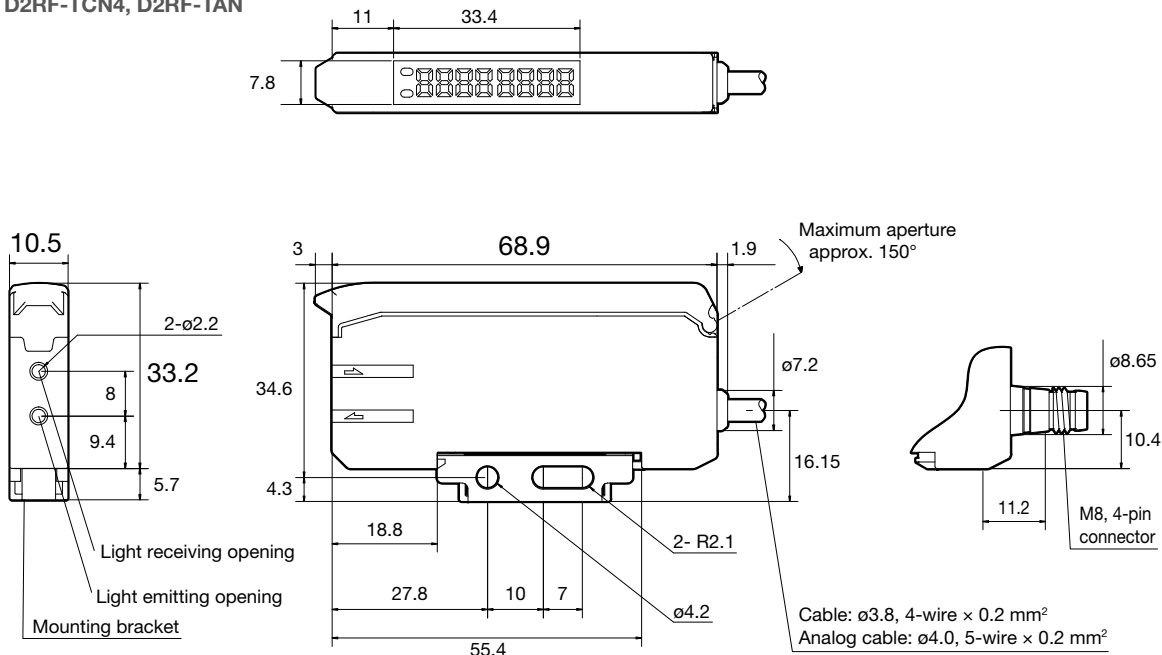

Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors

Fiber Amplifiers

D3RF, D3IF

UC1-CL11


D2RF

BRF, BIF

JRF

Water resistant stand-alone type


■ D2RF-2TN, D2RF-2TCN4, D2RF-2TAN

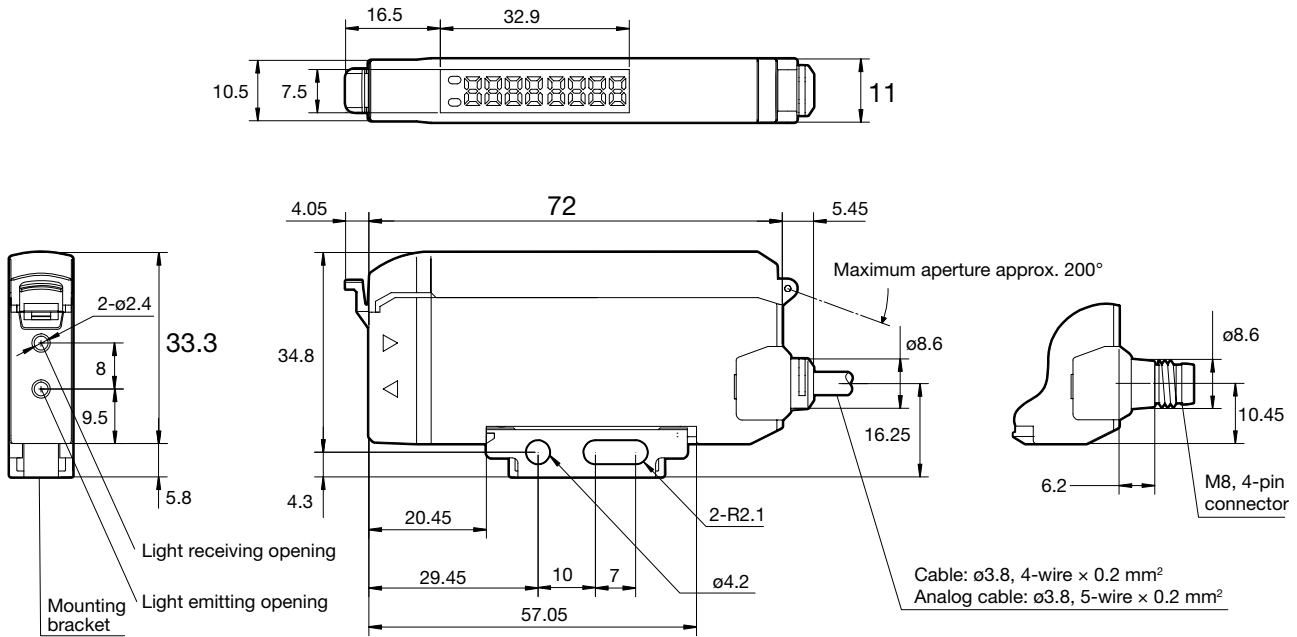

Connector cable (optional)

■ JCN-S, JCN-5S, JCN-10S

■ JCN-L, JCN-5L, JCN-10L

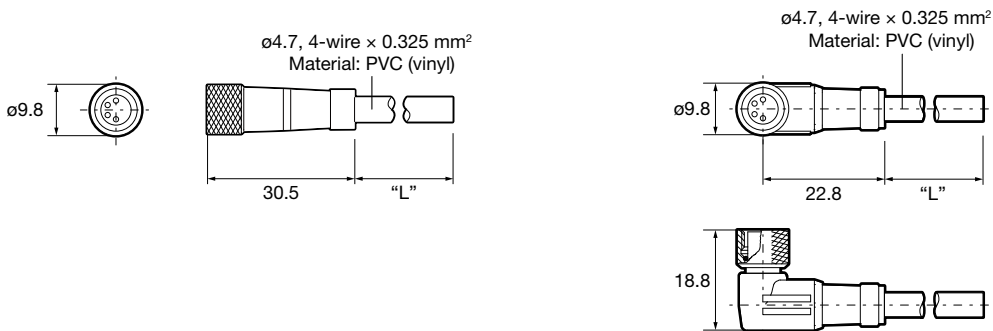

Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors

Fiber Amplifiers

D3RF, D3IF

UC1-CL11

D2RF

BRF, BIF

JRF