

Digital Video Recorder

NDR-BA3104




D1 Real-Time RECORDING



Key Features

- 4 video channels, 1 audio channel
- Recording speed up to 100 fps
- 1 internal HDD
- 3 monitor outputs (Main)
- Advanced network software

Dimensions

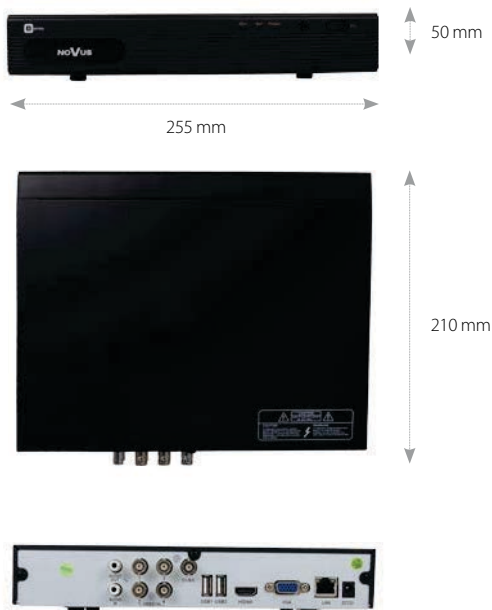

Related Products



HDD XXX GB SATA KIT



NV-RCDVRB-II

NDR-BA3104	
VIDEO	
Input	4 x BNC
Monitor Output	Main (split screen, full screen, sequence): 1 x HDMI, 1 x VGA, 1 x BNC
AUDIO	
Input/Output	1 x RCA (Line-in)/1 x RCA
RECORDING	
Compression	H.264
Speed	100 fps (720 x 576)
Mode	Time-lapse, Event (Motion detection), Schedule
Schedule	1 h intervals, individual settings for: each day, each camera, possibility of combining individual recording modes
Prealarm/Postalarm	5 s / 5 s - 2 min.
PLAYBACK	
Speed	Up to 100 fps (25 fps per channel)
Recorded Data Search	By date/time, events
BACKUP	
Methods	USB port (HDD or Flash memory), network
File Format	AVI, DAT
STORAGE	
Internal HDD	1 HDD 3.5" SATA
Total Capacity	2 TB
USB	2 x USB 2.0
ALARM	
Motion Detection	22 x 15 grid, individual settings of sensitivity
NETWORK	
Interface	1 x Ethernet - interface RJ-45, 10/100 Mbit/s
PC Software	CMS, B-Viewer, Internet Explorer
Smartphone Software	Super Live Pro (iPhone), Super Cam (Android, BlackBerry), Pocket Camera (Windows Mobile, Symbian)
Number of Connections with DVR	5 - in live monitoring mode, 1 - playback mode
E-mail	Alarm and system events notification
OPERATING SYSTEM	
Operation Mode	Quadruplex
OSD	Polish, English, Russian and others
Control	Front panel, IR remote controller, network, PC mouse (in-set included)
INSTALLATION PARAMETERS	
Dimensions (mm)	255 (W) x 50 (H) x 210 (D)
Weight	2 kg (without HDD)
Power Supply	12 VDC (100 ~ 240 VAC/12 VDC PSU in-set included)
Power Consumption	25 W (with 1 HDD)
Operating Temperature	0°C ~ 50°C