


Two wires Inductive Proximity sensor

TW series 兩線式 近接感應器

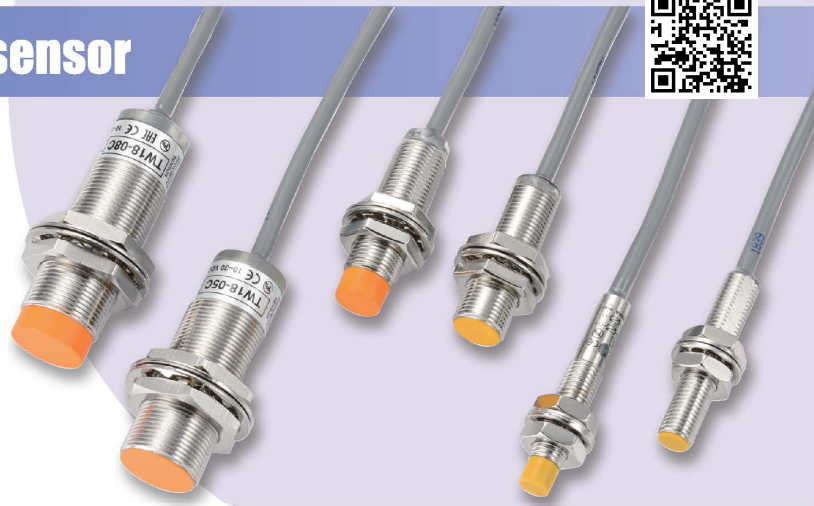

- High reliability with 「short-circuit」 & 「Polarity reversed」 protection circuit.
全機種附「短路保護」及「極性保護」回路
- Low leakage current : 0.8mA max.
洩漏電流小於「0.8mA」
- Protection class : IP-67
防水等級：「IP-67」
- Positive or Negative connection are available
可適用「正輸出」或「負輸出」接線法

General data / 共同規格

Specification	規格	Data	Connection diagram / 接線圖
Operating voltage	工作電壓	10 ~ 30 VDC	
Power ripple	電源漣波	< 20% of Vp-p	
Hysteresis	應差	< 10% of sensing distance	
Leakage current	洩漏電流	0.8mA max.	
Residual voltage	殘留電壓	4.0V max.	
Output current	輸出電流	5.0 ~ 150 mA max.	
Protection circuit	保護電路	Short-circuit & Polarity reversed protection circuit.	
Connection method	接線方式	2cores/4φ or M12 connector or M8 lead wire	
Housing material	外殼材質	Cu plated Ni or PBT or SUS-304	
Protection class	保護等級	IP-67	
Operating temperature	工作溫度	- 25°C ~ +80°C	
Operating humidity	工作濕度	35% ~ 95% RH	

Specification / 規格

Outline	Model	Output status	Sensing distance	Mounting method	Response frequency	Operating voltage	Connection method	Housing material
	TW08-01C	NO	1.0 mm	Flushed	2.0kHz	10 ~ 30 VDC	Lead wire	Cu plated Ni
	TW08-01CB	NC						
	TW08-02C	NO	2.0 mm	Non flushed	2.0kHz	10 ~ 30 VDC	Lead wire	Cu plated Ni
	TW08-02CB	NC						
	TW08-01CE	NO	1.0 mm	Flushed	2.0kHz	10 ~ 30 VDC	Lead wire	Cu plated Ni
	TW08-01CBE	NC						
	TW08-02CE	NO	2.0 mm	Non flushed	2.0kHz	10 ~ 30 VDC	Lead wire	Cu plated Ni
	TW08-02CBE	NC						

● Specification / 規格

Outline	Model	Output status	Sensing distance	Mounting method	Response frequency	Operating voltage	Connection method	Housing material
	TW12-02CSE	NO	2.0 mm	Flushed	1.0KHz	10~30 VDC	Lead wire	Cu plated Ni
	TW12-02CBSE	NC						
	TW12-04CSE	NO	4.0 mm	Non flushed	800Hz	10~30 VDC	Lead wire	Cu plated Ni
	TW12-04CBSE	NC						
	TW12-02C	NO	2.0 mm	Flushed	1.0KHz	10~30 VDC	Lead wire	Cu plated Ni
	TW12-02CB	NC						
	TW12-04C	NO	4.0 mm	Non flushed	800Hz	10~30 VDC	Lead wire	Cu plated Ni
	TW12-04CB	NC						
	TW12-02CE	NO	2.0 mm	Flushed	1.0KHz	10~30 VDC	Lead wire	Cu plated Ni
	TW12-02CBE	NC			5.00 mm			
	TW12E-05CE	NO	5.00 mm					
	TW12E-05CBE	NC						
	TW12-04CE	NO	4.0 mm	Non flushed	800Hz	10~30 VDC	Lead wire	Cu plated Ni
	TW12-04CBE	NC			8.00 mm			
	TW12E-08CE	NO	8.00 mm					
	TW12E-08CBE	NC						
	TW12-02C-M12	NO	2.0 mm	Flushed	1.0KHz	10~30 VDC	M12 connector	Cu plated Ni
	TW12-02CB-M12	NC						
	TW12-04C-M12	NO	4.0 mm	Non flushed	800Hz	10~30 VDC	M12 connector	Cu plated Ni
	TW12-04CB-M12	NC						
	TW18-05C	NO	5.0 mm	Flushed	500Hz	10~30 VDC	Lead wire	Cu plated Ni
	TW18-05CB	NC			10.0 mm			
	TW18E-10C	NO	10.0 mm					
	TW18E-10CB	NC						
	TW18-08C	NO	8.0 mm	Non flushed	400Hz	10~30 VDC	Lead wire	Cu plated Ni
	TW18-08CB	NC			16.0 mm			
	TW18E-16C	NO	16.0 mm					
	TW18E-16CB	NC						
	TW18-05CE	NO	5.0 mm	Flushed	500Hz	10~30 VDC	Lead wire	Cu plated Ni
	TW18-05CBE	NC			10.0 mm			
	TW18E-10CE	NO	10.0 mm					
	TW18E-10CBE	NC						
	TW18-08CE	NO	8.0 mm	Non flushed	400Hz	10~30 VDC	Lead wire	Cu plated Ni
	TW18-08CBE	NC			16.0 mm			
	TW18E-16CE	NO	16.0 mm					
	TW18E-16CBE	NC						
	TW18-05C-M12	NO	5.0 mm	Flushed	500Hz	10~30 VDC	M12 connector	Cu plated Ni
	TW18-05CB-M12	NC						
	TW18-08C-M12	NO	8.0 mm	Non flushed	400Hz	10~30 VDC	M12 connector	Cu plated Ni
	TW18-08CB-M12	NC						

● M8 & M12 lead wire cable / M8 & M12 接頭線

Model	Outline												
M8-3C-□m	<table border="1"> <thead> <tr> <th>4P PLUG</th> <th>COLOR</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>BROWN</td> </tr> <tr> <td>2</td> <td>BLACK</td> </tr> <tr> <td>3</td> <td>BLUE</td> </tr> </tbody> </table>	4P PLUG	COLOR	1	BROWN	2	BLACK	3	BLUE				
	4P PLUG	COLOR											
	1	BROWN											
	2	BLACK											
3	BLUE												
<table border="1"> <thead> <tr> <th>規格</th> <th>"A"</th> <th>"B"</th> <th>"C"</th> </tr> </thead> <tbody> <tr> <td>M8-3m</td> <td>3m</td> <td>50+3mm</td> <td>5+1mm</td> </tr> <tr> <td>M8-5m</td> <td>5m</td> <td>50+3mm</td> <td>5+1mm</td> </tr> </tbody> </table>	規格	"A"	"B"	"C"	M8-3m	3m	50+3mm	5+1mm	M8-5m	5m	50+3mm	5+1mm	
規格	"A"	"B"	"C"										
M8-3m	3m	50+3mm	5+1mm										
M8-5m	5m	50+3mm	5+1mm										
M8-4C-□m	<table border="1"> <thead> <tr> <th>4P PLUG</th> <th>COLOR</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>BROWN</td> </tr> <tr> <td>2</td> <td>WHITE</td> </tr> <tr> <td>3</td> <td>BLUE</td> </tr> <tr> <td>4</td> <td>BLACK</td> </tr> </tbody> </table>	4P PLUG	COLOR	1	BROWN	2	WHITE	3	BLUE	4	BLACK		
	4P PLUG	COLOR											
	1	BROWN											
	2	WHITE											
3	BLUE												
4	BLACK												
<table border="1"> <thead> <tr> <th>規格</th> <th>"A"</th> <th>"B"</th> <th>"C"</th> </tr> </thead> <tbody> <tr> <td>M8-3m</td> <td>3m</td> <td>50+3mm</td> <td>5+1mm</td> </tr> <tr> <td>M8-5m</td> <td>5m</td> <td>50+3mm</td> <td>5+1mm</td> </tr> </tbody> </table>	規格	"A"	"B"	"C"	M8-3m	3m	50+3mm	5+1mm	M8-5m	5m	50+3mm	5+1mm	
規格	"A"	"B"	"C"										
M8-3m	3m	50+3mm	5+1mm										
M8-5m	5m	50+3mm	5+1mm										
M12-4C-□m	<table border="1"> <thead> <tr> <th>4P PLUG</th> <th>COLOR</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>BROWN</td> </tr> <tr> <td>2</td> <td>WHITE</td> </tr> <tr> <td>3</td> <td>BLUE</td> </tr> <tr> <td>4</td> <td>BLACK</td> </tr> </tbody> </table>	4P PLUG	COLOR	1	BROWN	2	WHITE	3	BLUE	4	BLACK		
	4P PLUG	COLOR											
	1	BROWN											
	2	WHITE											
3	BLUE												
4	BLACK												
<table border="1"> <thead> <tr> <th>規格</th> <th>"A"</th> <th>"B"</th> <th>"C"</th> </tr> </thead> <tbody> <tr> <td>M12-3m</td> <td>3m</td> <td>50+3mm</td> <td>5+1mm</td> </tr> <tr> <td>M12-5m</td> <td>5m</td> <td>50+3mm</td> <td>5+1mm</td> </tr> </tbody> </table>	規格	"A"	"B"	"C"	M12-3m	3m	50+3mm	5+1mm	M12-5m	5m	50+3mm	5+1mm	
規格	"A"	"B"	"C"										
M12-3m	3m	50+3mm	5+1mm										
M12-5m	5m	50+3mm	5+1mm										
M12-4C- L-□m	<table border="1"> <thead> <tr> <th>4P PLUG</th> <th>COLOR</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>BROWN</td> </tr> <tr> <td>2</td> <td>WHITE</td> </tr> <tr> <td>3</td> <td>BLUE</td> </tr> <tr> <td>4</td> <td>BLACK</td> </tr> </tbody> </table>	4P PLUG	COLOR	1	BROWN	2	WHITE	3	BLUE	4	BLACK		
	4P PLUG	COLOR											
	1	BROWN											
	2	WHITE											
3	BLUE												
4	BLACK												
<table border="1"> <thead> <tr> <th>規格</th> <th>"A"</th> <th>"B"</th> <th>"C"</th> </tr> </thead> <tbody> <tr> <td>M12-L3m</td> <td>3m</td> <td>50+3mm</td> <td>5+1mm</td> </tr> <tr> <td>M12-L5m</td> <td>5m</td> <td>50+3mm</td> <td>5+1mm</td> </tr> </tbody> </table>	規格	"A"	"B"	"C"	M12-L3m	3m	50+3mm	5+1mm	M12-L5m	5m	50+3mm	5+1mm	
規格	"A"	"B"	"C"										
M12-L3m	3m	50+3mm	5+1mm										
M12-L5m	5m	50+3mm	5+1mm										

To manufacture the world standard controls
 By mass producing & standardizing
 To offer the excellent quality assurance
 By advance technology & strict total quality control

以「標準化」、「量產化」製造「世界標準」的電控器材
 以「先進技術」、「嚴格品管」提供最佳品質保證

www.fotek.com.tw



FOTEK

Think To Make More Easy & Efficient

陽明電機股份有限公司
FOTEK CONTROL CO., LTD.

Copy right © FOTEK CONTROLS CO., LTD. 2019/01/24

Specification may be modified without notice in advance.

本公司有權自行變更資料規格！規格變更恕不事先通知！

B-71

FOTEK CONTROLS
 EST. 1985

Av. Argentina N° 523 Tda. A12

C. C. ACOPROM Lima 01 - Perú

Tel.: 719 9811 / 680 2668 / 711 9327

Cel.: 9852-72098 / 9999-38660 / 9997-99822

E-mail: ventas.1@alltronicsperu.com / cotizador1.1@alltronicsperu.com

www.AlltronicsPerú.com