

Vandal Proof Camera

NVC-401V/IR

400
SERIES


960H



Key Features

- D/N function - electronic
- Resolution 650TVL
- Min. Illumination 0.14 lx (0 lx, IR on)
- Standard lens, f=3.6 mm/F=2.0
- IR LED, range up to 15 m
- IR-smart function
- Extended IR LED life

Dimensions

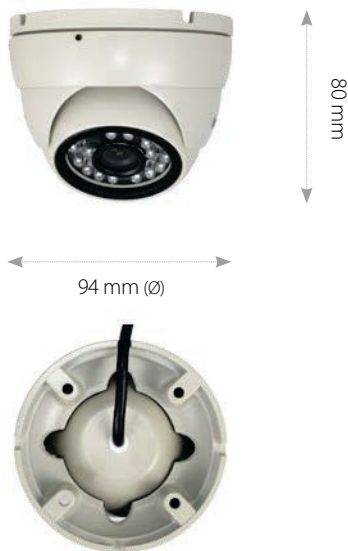

| | NVC-401V/IR |
|--------------------------------|---|
| IMAGE | |
| Pick-up Element | CCD imager, 1/3" SONY Super HAD II |
| Number of Effective Pixels | 976 (H) × 582 (V) |
| Horizontal Resolution | 650 TVL - color mode, 650 TVL - B/W mode |
| Min. Illumination | 0.14 lx/F=2.0 - color mode (1/50 s), 0 lx (IR on) - B/W mode |
| S/N Ratio | >52 dB |
| Electronic Shutter | Auto: 1/50 s ~ 1/100 000 s |
| LENS | |
| Type | Standard, f=3.6 mm/F=2.0 |
| Angle of View (H) | 74° |
| DAY/NIGHT | |
| Type | Electronic D/N function |
| Switching Mode | Auto/manual |
| Switching Level Adjustment | Yes |
| Switching Delay | 0 ~ 255 s |
| Visible Light Sensor | Yes |
| OTHER FUNCTIONS | |
| OSD | English, Russian and others (joystick on the cable) |
| Back Light Compensation (BLC) | Yes |
| High Light Compensation (HLC) | Yes |
| Wide Dynamic Range (WDR) | Yes |
| Digital Noise Reduction (DNR) | Yes |
| Privacy Zones | 4 |
| Motion Detection | Yes |
| Image Processing | Mirror effect |
| IR LED | |
| Number | 24 |
| Range | 15 m |
| Angle | 80° |
| INTERFACES | |
| Video Output | BNC, 1.0 Vp-p, 75 Ohm |
| INSTALLATION PARAMETERS | |
| Dimensions (mm) | 94 (ø) x 80 (H) |
| Weight | 460 g |
| Enclosure | Vandal proof, aluminium, ivory |
| Power Supply | 12 VDC |
| Power Consumption | 1,2 W 3,1 W (IR on) |
| Operating Temperature | -30°C ~ 40°C |
| Degree of Protection | IP 65 |

Related Products



NVB-BEH24DB